

## 12.02 Compound Sine Table type PF2/SD


**Heavy duty construction, Low height**

### Applications

Grinding , EDM , metrology

### Construction

. With standard permanent magnetic chuck type PF2 . Steel base body hardened to 60 HRC . Precision-ground surface for highest accuracy . Swiveling on long and short axis: respectively from 0° to 45° and from 0° to 30° Included with purchase: - 1 Actuating key - End stops - Table of sines  
 Angular accuracy  $\pm 5''$  sec  
 Pole pitch 2 mm  
 Parallelism  $\pm 0.003/100$  mm  
 Nominal force 100 N/cm<sup>2</sup>  
 Admissible wear of top plate 8 mm  
 Magnetic field height 4 mm

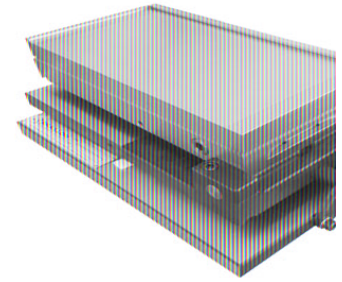


Art.-N°12.02

Diagram below: dimensions in mm

Product	Weight	A	B	C	D	E	F	G
12.02.175100	13,5	175	100	123,7	100	75	225	160
12.02.250125	23,4	250	125	123,7	100	100	300	185
12.02.300150	33,1	300	150	123,7	200	100	350	205
12.02.350150	51,0	350	150	130	300	125	400	205

### OPTIONS :

- With other magnetic chucks on request
- Part of palletizing system: Erowa, 3R, Hirschmann, Vischer & Boli

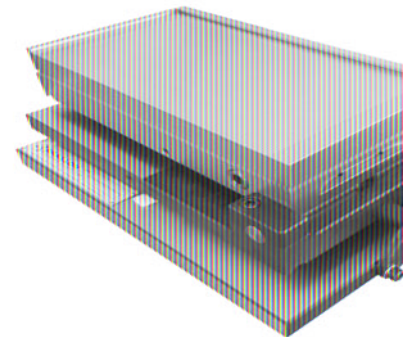

All right reserved to change construction and dimensions without notice - Print date :