

## 20.04.K Electromagnetic Lifter type K

AC

**High holding power, Heavy duty construction, Waterproof construction, Safe, Effective, According to EN13155 standard**

### Applications


Lifting , Handling

### Construction

. For lifting of flat loads or bulk material . Steel housing . Safety factor: 2:1 (EN131155) . ON/OFF switch with indicator lamp . Important! The whole active surface must be covered by lifted element . Indicated holding forces for ST37 with suitable thickness and without airgap Included with purchase: - 3 meters long cable - Mounting threaded holes

Voltage 230 VAC


Duty cycle 100 %

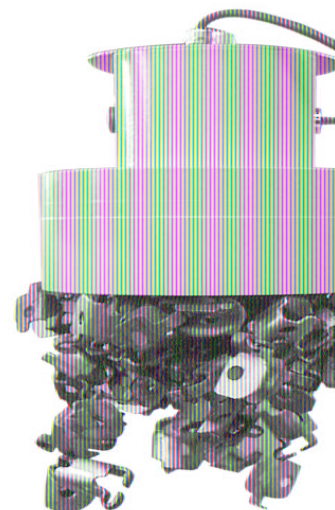

Art.-N°20.04.K-AC		Diagram below: dimensions in mm				
Product	Weight	A	B	C	D	E
20.04.K0.230AC	6,1	105	60	130	380 daN	60W
20.04.K1.230AC	18	160	105	200	520 daN	110W
20.04.K2.230AC	41	245	110	205	1250 daN	145W
20.04.K3.230AC	72	300	110	205	2450 daN	210W

### OPTIONS :

- Other sizes on request
- Other voltages on request
- Tailor made shapes

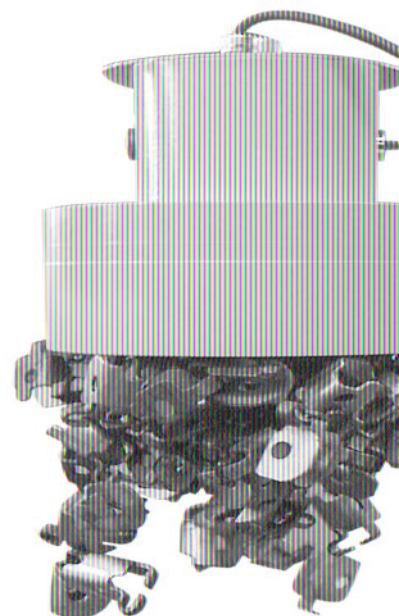

All right reserved to change construction and dimensions without notice - Print date :