

60.06 Permanent magnetic Pulley

Without ON/OFF system


Low sensibility to airgap, Heavy duty & compact construction, High power

Applications

Protection , Separation

Construction


. In stainless steel . To separate ferrous parts Execution in Ferrite or Neodymium magnets A=diameter B=width



Art.-N°60.06		Diagram below: dimensions in mm							
Product	Weight	A	B	C	D	E	F	G	H
60.06.100250	15	100	250	-	-	-	-	-	-
60.06.100500	25	100	500	-	-	-	-	-	-
60.06.150500	35	150	500	-	-	-	-	-	-
60.06.150600	42	150	600	-	-	-	-	-	-
60.06.1501000	80	150	1000	-	-	-	-	-	-
60.06.200400	65	200	400	-	-	-	-	-	-
60.06.200450	70	200	450	-	-	-	-	-	-
60.06.250650	140	250	650	-	-	-	-	-	-
60.06.320450	160	320	450	-	-	-	-	-	-
60.06.320900	320	320	900	-	-	-	-	-	-
60.06.3201100	400	320	1100	-	-	-	-	-	-
60.06.400800	400	400	800	-	-	-	-	-	-
60.06.4001100	550	400	1100	-	-	-	-	-	-
60.06.500900	600	500	900	-	-	-	-	-	-
60.06.5001100	750	500	1100	-	-	-	-	-	-

OPTIONS :

Other
dimensions on
request
ATEX or
specific
execution

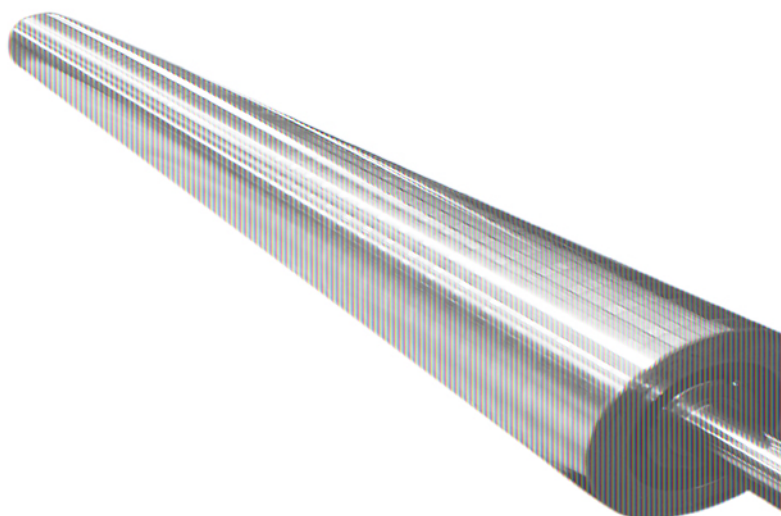

All right reserved to change construction and dimensions without notice - Print date :

Bridage, Magnétisme & Systèmes Sarl - 120 rue Jean Jaurès - F 92300 Levallois Perret
Tél. 33 (0)1 80 87 61 69 - Fax 33 (0)1 80 87 61 70 - info@bms-industrie.com - www.bms-industrie.com