

12.01 Single Sine Table type PF2/SS

Low height

Applications

Grinding , EDM , metrology

Construction

. With standard permanent magnetic chuck type PF2 . Steel base body hardened to 60 HRC . Precision-ground surface for highest accuracy . Swiveling on long axis: from 0 to 60° Included with purchase: - 1 Actuating key - End stops - Table of sines

Angular accuracy $\pm 5''$ sec


Pole pitch 2 mm

Parallelism $\pm 0.003/100$ mm

Nominal force 100 N/cm²

Admissible wear of top plate 8 mm


Magnetic field height 4 mm

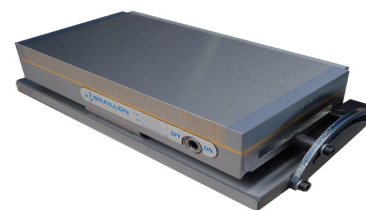

Art.-N°12.01		Diagram below: dimensions in mm					
Product	Weight	A	B	C	D	E	F
12.01.175100	10,5	175	100	85,4	75	225	102
12.01.250125	18,3	250	125	85,4	100	305	132
12.01.150150	12,7	150	150	85,4	100	200	152
12.01.300150	26,7	300	150	85,4	100	350	152
12.01.350150	38,0	350	150	85,4	100	400	152

OPTIONS :

- With other magnetic chucks on request
- Swiveling on short axis
- Part of palletizing system: Erowa, 3R, Hirschmann, Vischer & Boli
- Mounting slot in the base plate

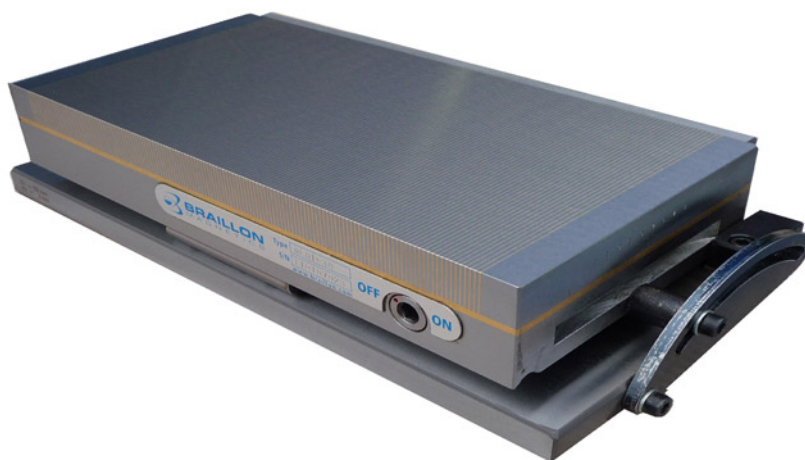

All right reserved to change construction and dimensions without notice - Print date :